

CERAMIC DISC INSTRUCTION

Please read instructions carefully prior to installation.

All instructions serve as a guide only and must be installed by a licenced plumber as this will VOID warranty.

Supply lines must be flushed prior to installation to remove any foreign matter.

Stop valves must be installed in accordance with the regulatory authorities.


All products are suitable with most instantaneous hot water heaters but not suitable with gravity fed hot water systems.

TOOLS REQUIRED: **2mm or 2.5mm Allen Key**
 14mm Deep Tube Socket
 25mm Deep socket

1. Ceramic Disc Cartridge	2. Extension	3. Locking Nut
4. Fiber Washer	5A. Wall Breech	5B. Basin Body


1. Prior to installing ceramic disc cartridge make sure seat surface is clean and smooth otherwise reseal and recheck. Also ensure that lines have been flushed.
2. Remove locking nut (3) from the complete ceramic disc (1) assembly as supplied. Hot and Cold spindles are inter-changeable and the colour marking at the base of the spindle is an indicator of the direction which the spindle will turn on and off.
3. Place ceramic disc cartridge (1) into wall breech (5A) or body (5B). Tighten ceramic disc cartridge (1) firmly using the 14mm Deep tube socket into the wall breech (5A) or body (5B).

2. extension

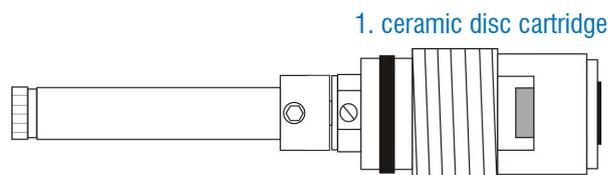


4. Ensure that the disc is in the closed position and then fit handle to align.
 *To align the handle loosen grub screw/s from the extension (2) using 2mm or 2.5mm allen key, then remove extension (2) from the ceramic disc cartridge (1) . Keep altering the position of the extension (2) and ceramic disc cartridge (1) whilst checking the handle alignment to get the required result.
5. Once aligned ensure the extension (2) is pushed firmly on to the ceramic disc (1) and tighten grub screw(s) firmly using the 2 or 2.5mm allen key. Take care whilst doing this.
6. Push the fibre washer (4) over the ceramic disc (1) and onto the face of the wall breech (5A) or basin body (5B).
7. Place the locking nut (3) over the ceramic disc cartridge (1) and tighten firmly using a 25mm deep tube socket.
8. Turn water supply on and check for leak, then complete tapware assembly.

WALL INSTALLATION

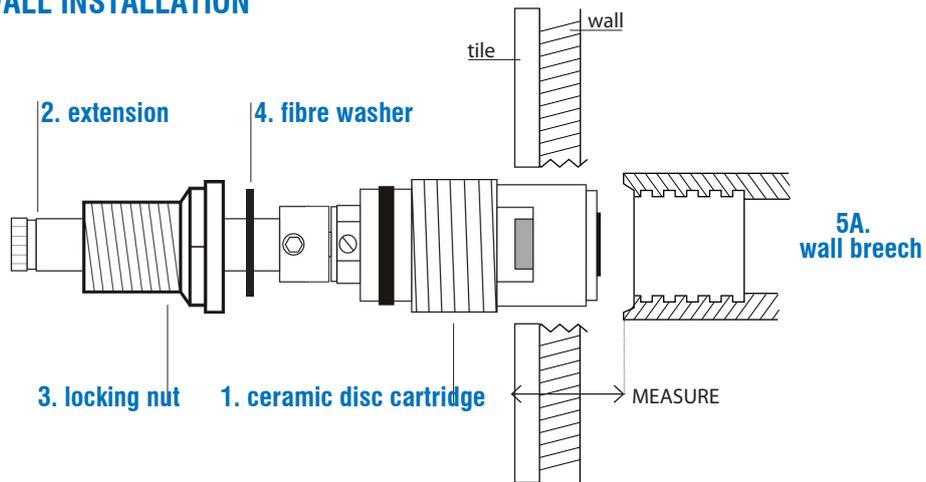

HOB INSTALLATION

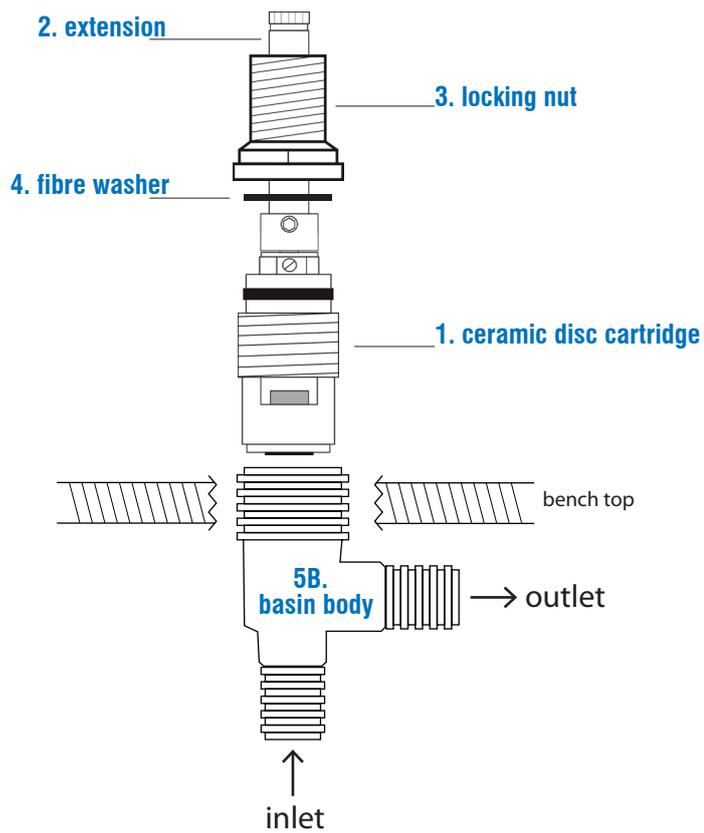

For further queries please contact the place of purchase of this Linsol product.

www.linsol.com.au

© COPYRIGHT LINSOL PTY LTD.